

OEM Single-Deck End Cap Merchandiser

(Deli / Meat)

ELECTRICAL DATA

Fans Per Case	High Efficiency Fans		Anti-Condensate Heaters		Defrost Heaters			
	120 Volts		120 Volts		208 Volts		240 Volts	
	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
2	0.15	9.2	0.35	42.0	2.88	600	3.33	798

GUIDELINES and CONTROL SETTINGS

BTUH/case •		Superheat Set Point @ Bulb (°F)	Evaporator (°F)	Discharge Air (°F)	Discharge Air Velocity (FPM) •
Conventional	Parallel				
2974	2726	6 - 8	22	29	232

DEFROST CONTROLS

Defrosts Per Day	Run-Off Time (Min)	Electric Defrost		Timed-Off Defrost		Hot Gas Defrost	
		Fail-Safe (Min)	Termination Temp (°F)	Fail-Safe (Min)	Termination Temp (°F)	Fail-Safe (Min)	Termination Temp (°F)
2	6 - 8	40	49	70	47	26	45

NOTES:

- Listed discharge air velocity represents the average velocity at the peak of defrost.
- Temperature and defrost settings listed above are recommended start-up settings. Final operational settings may need to be adjusted for the store conditions in which the case operates.
- The recommended evaporator temperatures may need to be adjusted based on system setup, store conditions, etc. The minimum recommended evaporator temperature is 4°F below the listed evaporator temperature.

Hillphoenix

REVISION: 110501_0000

A DOVER COMPANY





All measurements are taken per ASHRAE - 72 - 2005 specifications. Hillphoenix refrigerated display cases for sale in the United States meet or exceed Department of Energy 2012 energy efficiency requirements.

Defrost Schedule	
Defrosts per Day	Time
1	12 midnight
2	12am - 12pm
3	6am - 2pm - 10pm
4	12am-6am-12pm-6pm
6	12am-4am-8am-12pm-4pm-8pm

OEM Single-Deck End Cap Merchandiser

(Deli / Meat)

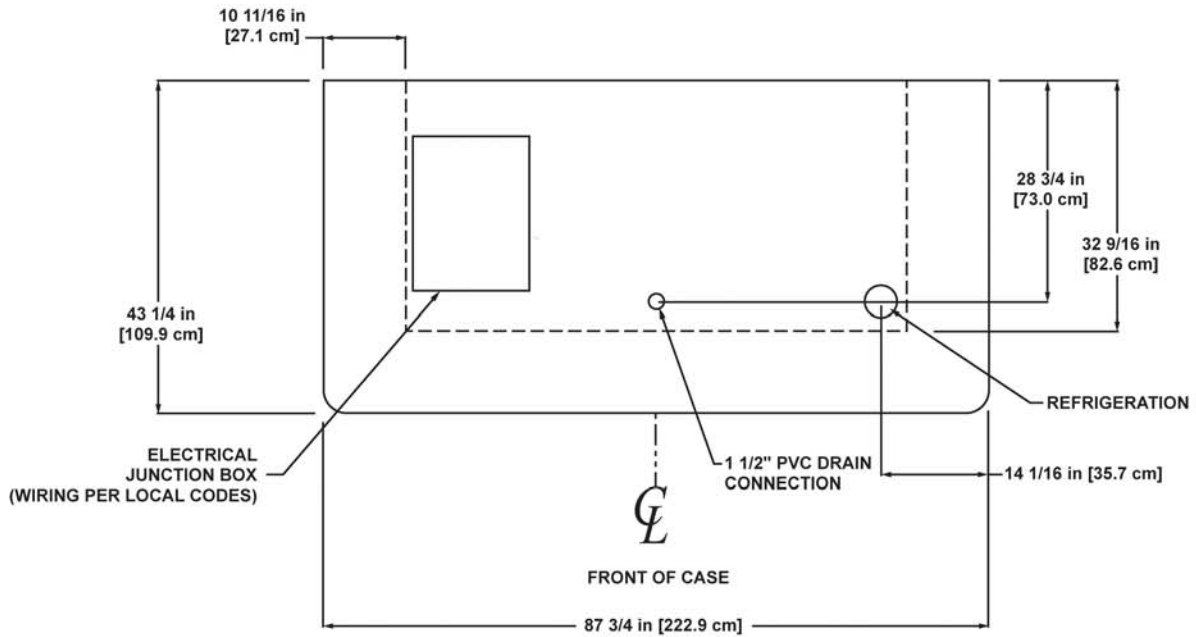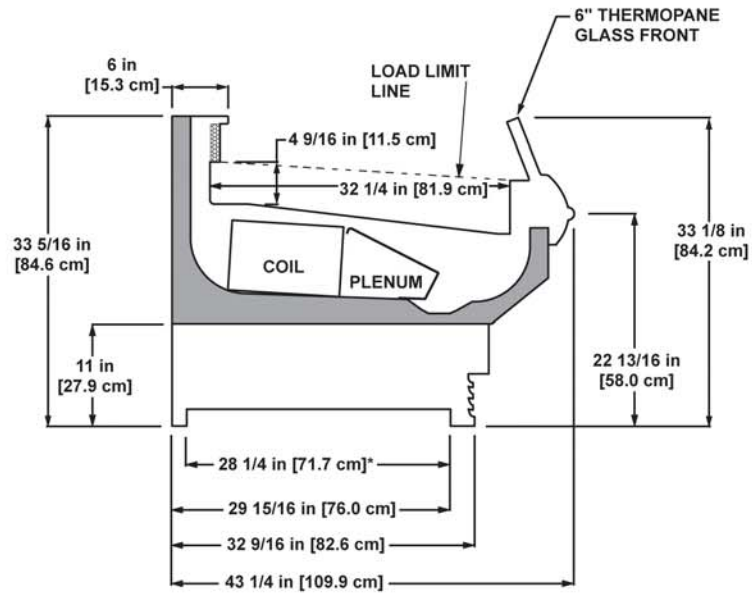

NOTES:

* STUB-UP AREA

- SUCTION LINE - 7/8", LIQUID LINE - 3/8"
- DASHED LINES SIGNIFY AREA INSIDE BASE RAIL BEHIND KICK-PLATE